


MAIN SEAL REPLACEMENT INSTRUCTIONS

FN Main Seal Replacement

DESCRIPTION:

Main Seal Replacement for FN style connectors.

Main Seal

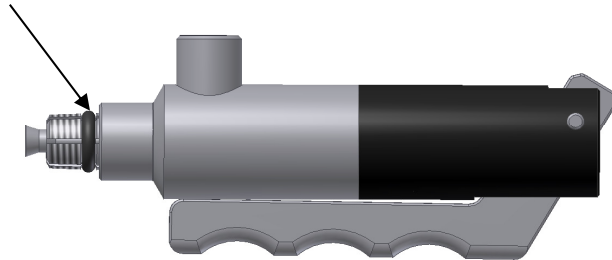

Note: If your connector is equipped with a pneumatic/push button style connector, air pressure will be needed to actuate the connector.



Please thoroughly read the instructions to properly replace the seal. The SnapMate is designed to provide a safe, reliable leak-tight seal and connection when properly maintained and operated.

- The main seal is specifically designed for the application. DO NOT use any substitute seal.
- Follow the replacement instructions carefully.
- DO NOT use excessive force to replace seal as this may damage the seal or connector.
- Use caution when disassembling the connector.

REPLACEMENT:

- 1) Actuate the connector and hold in this position.
- 2) Remove the main seal from the collets.
- 3) Place new main seal onto the collets, into the o-ring groove.

FasTest, Inc. Product Warranty

FasTest, Inc. warrants its products against defects of workmanship and/or material for 90 days from the date of the sale by FasTest, Inc. This warranty is void if the product is misused, tampered with or used in a manner that is not in accordance with FasTest, Inc. recommendations and/or instructions. FasTest, Inc. is not liable for consequential or other damages including, but not limited to, loss, damage, personal injury, or any other expense directly or indirectly arising from the use of or inability to use its products either separately or in combination with other products. ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, WHETHER ORAL OR WRITTEN, INCLUDING BUT NOT LIMITED TO WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Remedy under this warranty is limited to replacement of the product or an account credit in the amount of the original selling price, at the option on FasTest, Inc. All allegedly defective products must be returned prepaid transportation to FasTest, Inc. along with information describing the products performance, unless disposition in the field is authorized in writing by FasTest, Inc.