

# LINEAR




MOTOR FREE  
PISTON SYSTEM



# VP0435A

## Airflow & Power Consumption


## Specifications

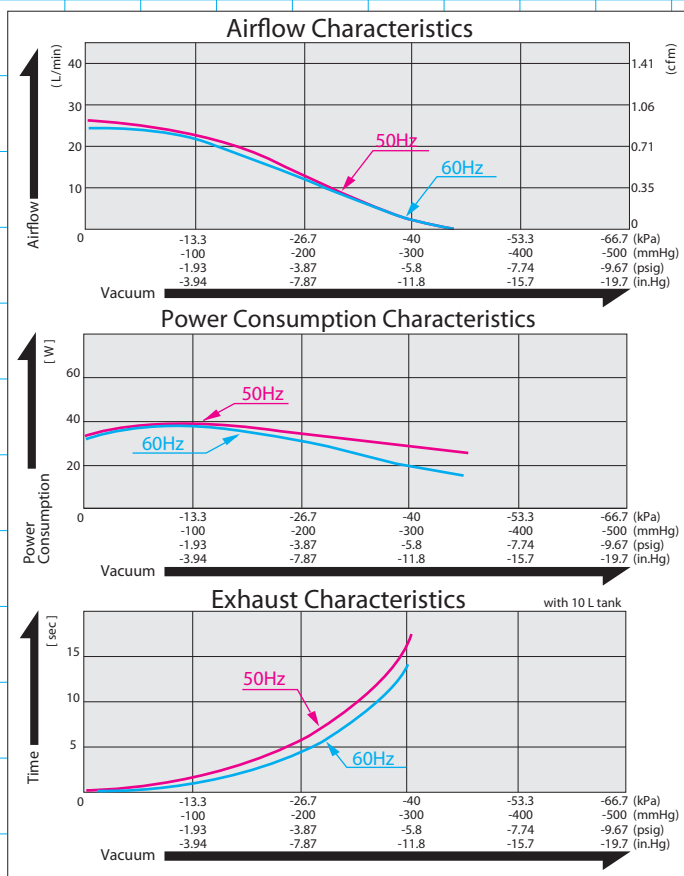


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-46.7 kPa (-350 mmHg)	-467 mbar	-13.78 in.Hg
Free Air Displacement	25 L/min		0.88 cfm
Rated Voltage	115 V AC or 230 V AC		
Power Consumption	39 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	3,000 hours		
Inlet	ISO Rc 1/4		
Outlet	ISO Rc 1/4		
Duty Cycle	Continuous		
Coil Insulation Class	B or its equivalent (JETL) / UL		
Mounting Dimensions	68 (L) x 84 (W) mm	2-11/16"(L)x3-5/16"(W)	
Gross Weight	2.3 kg	5.1 Lbs.	
Leadwire Length	200 mm	7-7/8"	

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

## Application Examples



Machine Screw Feeder



Medical Cup Suction

## Sketch Drawing and Mounting Dimensions Diagram (mm)

