


GTEK AUTOMATION

A Division of Pacific Air Engineering, Inc.

3 Way Solenoid Valve

Applications: For use on a Varsity of Medical, Industrial and Appliance OEM Applications that Requires a Low Pressure/Low Cost Pneumatic Solenoid Valve.

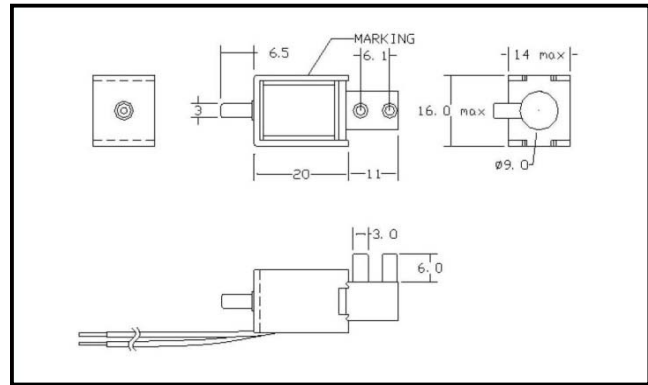

Specifications:	SV3W-6VDC	SV3W-12VDC	SV3W-24VDC
1. Rated Pressure:	5.0 PSI (260mmHg)		
2. Configuration:	3 Way		
3. Rated Voltage:	DC6V (5.4-6.6)	DC12V (10.8-13.2V)	DC24V (21.6-26.4V)
4. Rated Current:	375mA	400mA	370mA
5. Coil Resistance:	16 Ohms +/- 10%	30 Ohms +/- 10%	65 Ohms +/- 10%
6. Rated Power Consumption:	2.25 Watts	4.8 Watts	8.8 Watts
7. Temperature:	0 - 45 Degrees C		
8. Insulation Grade:	A		
9. Media:	Air or Inert Gases		
10. Max On Time:	10 Seconds		
11. Duty Cycle:	20%		
12. Leakage:	Max 15mmHg (From 260mmHg in 500cc Tank)		
13. Exhaust Time:	Max 6.0 Seconds	Max 8.0 Seconds	Max 6.0 Seconds
* From 300mmHg to 15mmHg in 500cc Tank.			
14. Insulation Resistance:	50M Ohms		
15. Plastic Port:	3mm O.D. x 2		
16. Steel Port:	3mm O.D.		
17. Lead Wires: (28 AWG)	150mm Length		
18. Performance Test:	0.5 Second ON, 5 Seconds OFF, 50,000 Times		

GTEK AUTOMATION

A Division of Pacific Air Engineering, Inc.

26212 Dimension Drive, Suite 150, Lake Forest, CA 92630

Ph. 949-680-4242, Fax. 949-680-4243, Email: Sales@Gtek-Automation.com

Web Site: Gtek-Automation.com