

# LINEAR

## VP0450




MOTOR FREE  
PISTON SYSTEM



### Airflow & Power Consumption


### Specifications

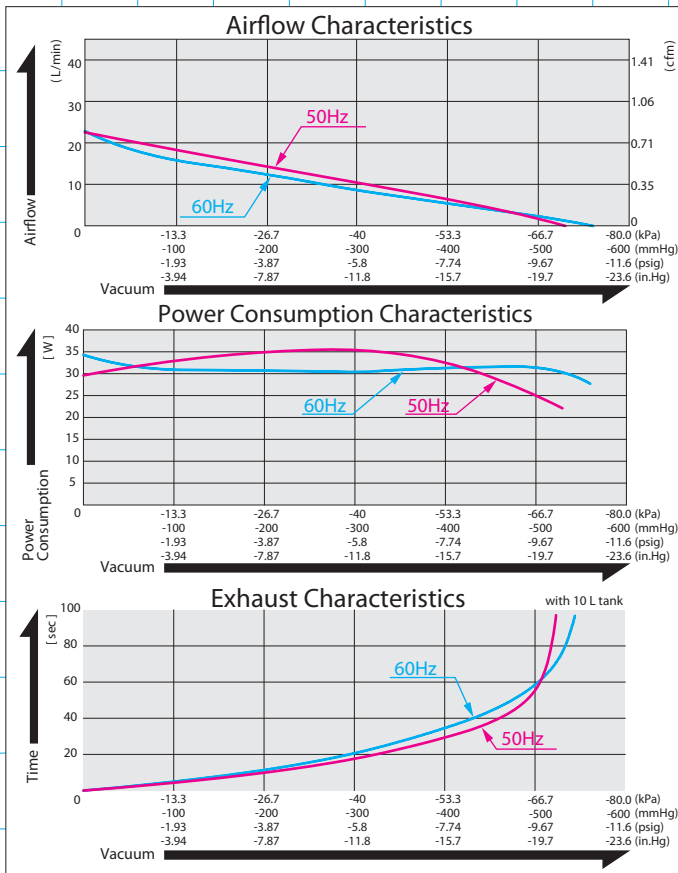


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-66.7 kPa (-500 mmHg)	-667 mbar	-19.7 in.Hg
Free Air Displacement	18 L/min		0.64 cfm
Rated Voltage	120 V AC or 230 V AC		
Power Consumption	34 W or 35 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	10,000 hours		
Inlet	ISO Rc 1/4		
Outlet	ISO Rc 1/4		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL)		
Mounting Dimensions	85 (L) x 88 (W) mm	3-11/32"(L) x 3-15/32"(W)	
Gross Weight	2.2 kg		4.9 Lbs.
Leadwire Length	300 mm		11-13/16"

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

### Application Examples



Machine Screw Feeder



Medical Cup Suction

### Sketch Drawing and Mounting Dimensions Diagram (mm)

