

LINEAR




MOTOR FREE
PISTON SYSTEM



VP0935A

Airflow & Power Consumption

Specifications

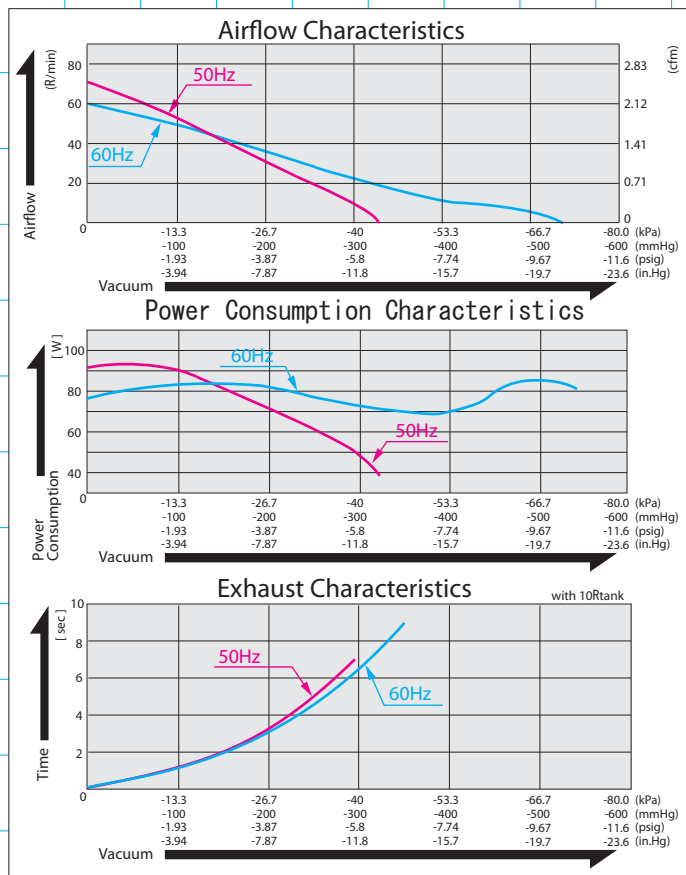


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-44 kPa (-330 mmHg)	-440 mbar	-13 in.Hg
Free Air Displacement	60 L/min		2.12 cfm
Rated Voltage	115 V AC or 230 V AC		
Power Consumption	95 W		
Rated Frequency	60 Hz & 50 Hz		
Life Expectancy	10,000 hours		
Inlet	ISO Rc 1/4 (female threaded)		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	B or its equivalent (JETL) or B for UL		
Mounting Dimensions	102 (L) x 130 (W) mm	4"(L) x 5-1/8"(W)	
Gross Weight	4.4 kg	9.7 Lbs.	
Leadwire Length	200 mm	7-7/8"	

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.
*Operations at higher than -44kPa need an additional leak valve or relief valve on the inlet piping.

Application Examples



Drafter Sheet Suction



Metal Powder Recycling

Sketch Drawing and Mounting Dimensions Diagram (mm)

