


FasCal - Sleeve Actuated Connectors - HPB Series



FasTest sleeve actuated **HPB** connectors are the preferred method for fast, safe and repeatable connections to *Swagelok*[®], *Ferulok*[®] or similar compression fittings as well as male NPT and “AN” 37° flare style male threads. Simply push on to fitting to connect; pull sleeve away from connection to release.

- Safety feature will not allow disconnect under pressure
- Instant connections from vacuum to 5000 psi
- No damage to threaded parts during calibration

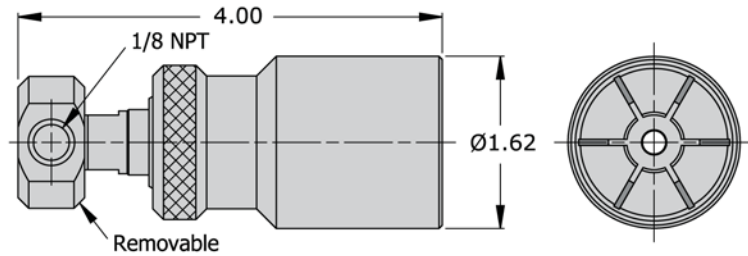

For Compression Fittings

Part Number	Connects to	Rated PSI	Housing Material	Seal Material	Main Seals Package (5)
HPB-CF04021	1/4" (7/16-20) <i>Swagelok</i>	5000	Stainless Steel	Buna N	S1008-B70
HPB-CF06021	3/8" (9/16-20) <i>Swagelok</i>	5000			S1011-B70
HPB-CF08021	1/2" (3/4-20) <i>Swagelok</i>	5000			S1013-B70
HPB-CF04021F	1/4" (7/16-20) <i>Ferulok</i>	5000			S1008-B70
HPB-CF06021F	3/8" (9/16-18) <i>Ferulok</i>	5000			S1011-B70
HPB-CF08021F	1/2" (3/4-16) <i>Ferulok</i>	5000			S1013-B70

For NPT Male Threads

Part Number	Connects to	Rated PSI	Housing Material	Seal Material	Main Seals Package (5)
HPB-041021	1/4" NPT	5000	Stainless Steel	Buna N	S1008-B70
HPB-061021	3/8" NPT	5000			S1011-B70
HPB-081021	1/2" NPT	5000			S1013-B70

For “AN” 37° Flare Male Threads

Part Number	Connects to	Rated PSI	Housing Material	Seal Material	Main Seals Package (5)
HPB-049021	- 4 (7/16-20)	5000	Stainless Steel	Buna N	S2070-0270B70
HPB-069021	- 6 (9/16-18)	5000			S1012-B70
HPB-089021	- 8 (3/4-16)	5000			S1015-B70

Notes:

Optional seal materials available are FKM (Viton) and EPDM.

Examples: HPB-xxx021**V** = FKM
 HPB-xxx021**E** = EPDM